

HDUBARTK-R

ACTIVE BALUN

AHD, CVI, TVI and CVBS Active Video Balun – Receiver



Key Features

- Up to 1,200m transmission distance (with active transmitter) (CVBS)
- Compatible with HDCVI, HDTV, AHD, CVBS signals
- ESD protection

The Genie HDUBARTK-R is a 1CH HD analogue video UTP receiver that transfers real-time analogue video signal up to 1,200m (CVBS) through Cat5/5e/6 cable.



Specification

Video Transmission and Connector

Video Connector	1 x BNC (Male)
Cable Port	1 x 3 Pin Terminal
Compatible Video Type	AHD, CVBS, HDCVI, HDTVI Signal
Transfer Bandwidth	0-75MHz
Signal Indicator	Yellow solid ON : Power input normal Green solid ON : Signal input normal
Anti-Interference	>60dB

Protection

Surge Protection of Coaxial Port	2 KV Differential-mode 2KV Common-mode Per :IEC61000-4-5
Surge Protection of Line Connector	Signal Line-pair : 2 KV Differential-mode 2KV Common-mode Per :IEC61000-4-5
ESD Protection	1a Contact Discharge 6 KV 1b Air Discharge 8KV Per :IEC61000-4-2


Functions

Transfer Signal Number	1CH Video
Transmission Distance	Up to 1,200m (CVBS)


Others

Voltage Input	DC12-20V or A C9-24V
Working Temperature	-10°C ~ 55°C
Storage Temperature	-45°C ~ 75°C
Humidity	0 ~ 95%
Dimensions	113 × 45.5 × 29 mm
Weight	65g

Dimensions

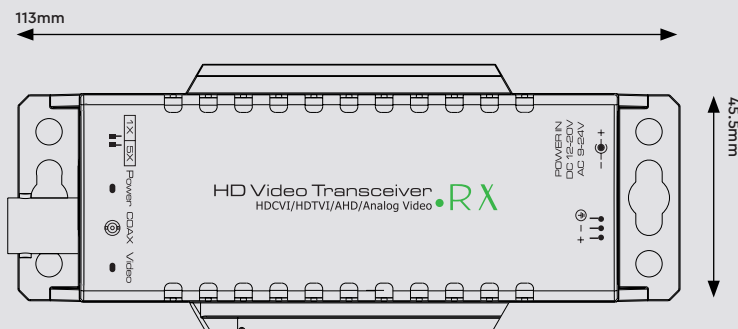

Application

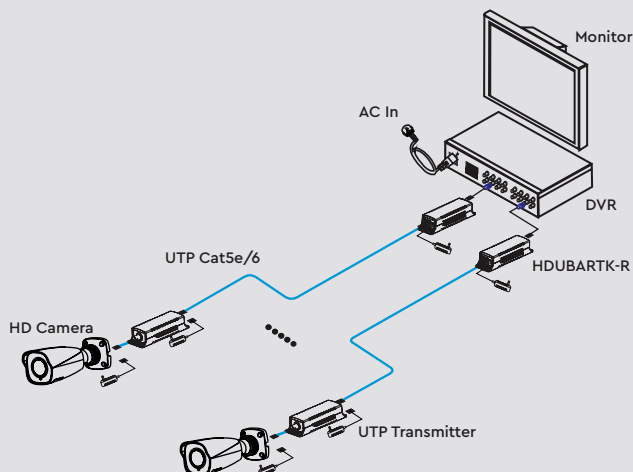

Bioaccess Sales Ltd. reserves the right to change specifications without notice. Please contact your representative to confirm current specifications.

Sales +44(0)1707 330541
Enquiries sales@genieproducts.co.uk
Website www.genieproducts.co.uk

