

WIP2BVLG

BULLET CAMERA

2MP IP Lite IR Varifocal Bullet Camera with 2.8–12mm Lens



Key Features

- 1080p full real time coding
- 20–30m IR distance (In ideal conditions)
- 2.8–12mm megapixel lens
- 3D DNR
- Digital WDR
- True day / night
- MIC / Line in G.711A / U Audio Codec
- IP and MAC address filtering
- Configuration backup
- Alarm image size dependent on set stream resolution
- RTSP streaming with or without authentication
- Mirror and flip image
- Multiple privacy masking
- Remote monitoring
- Supports smart phones and tablets

The Genie **WIP2BVLG** is an IP IR varifocal bullet camera with a 2.8–12mm lens and 20–30m IR distance in ideal conditions. The camera has 1080p full real time coding as well as remote monitoring in a grey finish.



Specification


Camera

Image Sensor	1/3" CMOS
Image Size	1920 × 1080
Electronic Shutter	1/25s ~ 1/100,000s
Effective Pixels	752 (H) × 582 (V)
Minimum Illumination	0 Lux (IR LED On)
Lens	2.8 ~ 12mm
Video Format	PAL / NTSC
Wide Dynamic Range	Yes
3D DNR	Yes

Image

Video Compression	H.264
Resolution	1080p (1920 × 1080), 720p (1280 × 720), VGA (640 × 480), QVGA (320 × 240)
Multi-Stream	1920 × 1080 (1-30fps), 1280 × 720 (1-30fps), 1280 × 720 (1-10fps), 640 × 480 (1-30fps), 320 × 240 (1-30fps)
Bit Rate	64Kbps ~ 4Mbps
Encode Mode	VBR / CBR
Audio Compression	G711A
Quality	Five levels under VBR, Freely adjustable under CBR
Image Settings	Saturation, Brightness, Contrast, etc (Adjustable through client software or web browser)

Dimensions

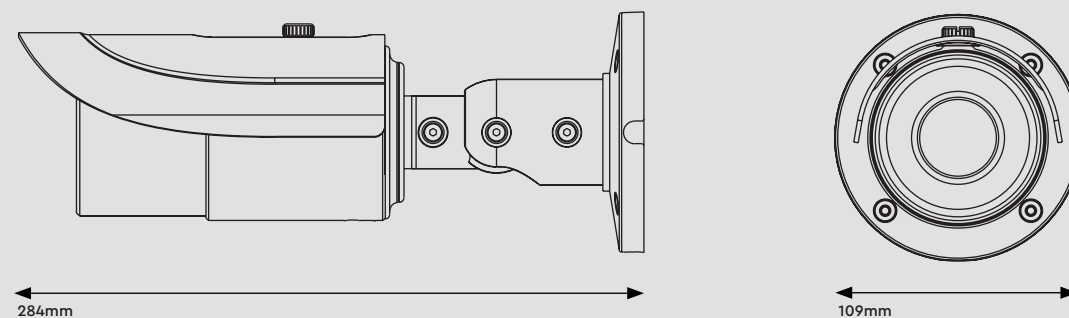


Accessories



WIPJBBVG
Junction Box for
Varifocal Bullet Cameras



WIPMPPM
Multi Purpose Pole Mount
Bracket - White



WIPMPCM
Multi Purpose Corner
Mount Bracket - White

Functions

Remote Monitoring	IE browsing, CMS remote control
Online Connection	Supports simultaneous monitoring for up to 4 Users. Supports multi-stream real time transmission
Protocol	TCP/IP, UDP, DHCP, NTP, RTSP, PPPoE, DDNS, SMTP, FTP
Day & Night	ICR
Smart Alarm	Motion alarm
IR Distance	Up to 25m (In ideal conditions)

Interface

Network	RJ45
Audio	One way audio (MIC in x1)

Others

Ingress Protection	IP66
Power Supply	DC12V / PoE
Operating Environment	Temperature: -40°C ~ 50°C, Humidity: 10% ~ 90%
Dimensions	109 × 284 mm
Weight	1115g