


WNVR18P5AI

NETWORK VIDEO RECORDER

PoE 8 Channel H.265 8MP NVR with 1HDD Bay and Facial Recognition

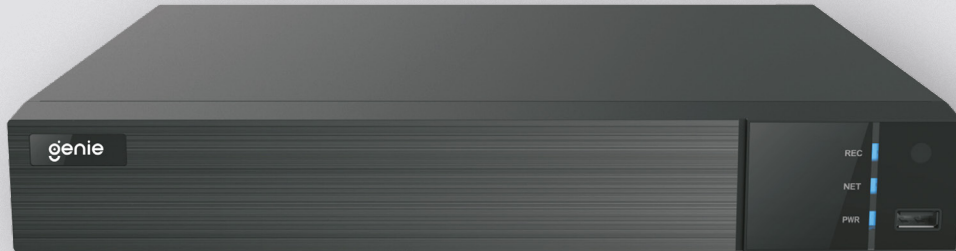

Key Features

- Supports 8 CH 8MP, 6MP, 5MP, 4MP, 3MP, 1080p, 1280×1024, 960p, 720p, 960H, D1, CIF IP video input
- Standard H.265 high profile compression format to get high-quality video at much lower bit rate
- Intuitive and user-friendly Graphic User Interface (GUI), Windows style operation by mouse
- Multi-mode recording: Manual / Timer / Motion / Sensor / Smart events
- Playback : 8CH simultaneous playback
- Supports face detection and comparison
- Search : Time slice, time, event, tag, smart and face database search
- Multi-user online simultaneously
- Authorisation management, log view and device status view
- Supports multiple VCA (Video Content Analytics) events, such as object abandoned/missing, region intrusion, tripwire, video tampering, etc.
- Supports POS information overlay on live view and playback
- Express and flexible backup via USB, network and so on.
- Pentaplex : Preview, record, playback, backup and remote access
- DHCP, DDNS, PPPoE network protocol
- Remote control via Web Client or CMS : Preview, playback, backup, PTZ and configuration
- 8 PoE network ports, PoE power supply supported
- Dual stream technology for local storage with high definition, remote network transmission and remote surveillance with mobile device
- 4K output, true high resolution display
- Supports PTZ preset and auto cruise, up to 255 presets and 8 cruises
- Supports NAT function and QR code scanning by mobile phones
- Powerful mobile surveillance by smart phones with iOS and Android OS
- P2P ready for hassle free remote access

The Genie **WNVR18P5AI** is an 8 channel PoE H.265 8MP NVR with 1 HDD bay and facial recognition. The NVR supports 8 channel 8MP, 6MP, 5MP, 4MP, 3MP, 1080p, 1280 × 1024, 960p, 720p, 960H, D1 and CIF IP video input as well as 8 channel simultaneous playback.



Specification

System

OS	Embedded Linux
----	----------------

Video

Input	8CH IPC input
Incoming Bandwidth	80Mbps
Output	HDMI x 1 : 3840×2160 @60fps / 3840×2160 @ 30fps / 1920×1080 / 1280×1024 / 1024×768 VGA 1 : 1920×1080 / 1280×1024 / 1024×768
Resolution	8MP / 6MP / 5MP / 4MP / 3MP / 1080p / 1280×1024 / 960p / 720p / 960H / D1 / CIF
Compression	Standard H.265/H.264

Audio

Input	8 CH IPC audio input
Output	RCA x1
Two-Way Audio	RCA x1
Compression	G.711 (A/U)

Playback

Playback	Maximum 8CH (Simultaneous)
Search	Time slice / Time / Event / Tag search
Smart Search	Highlighted colour to display the camera record in a certain period of time, different colours refers to different record events.
Function	Play, Pause, FF, FB, Digital zoom, etc.
Decoding Capability	1CH 8MP / 4CH 1080p (Live View/ Playback)

Alarm

Mode	Manual, Sensor, Motion, Exception, Smart events
Input	8 CH local alarm input, supports IPC alarm input
Output	4 CH
Triggering	Record, Snap, Preset, E-mail, etc.

Network

Interface	RJ45 1000Mbps x 1
Protocol	TCP / IP, PPPoE, DHCP, DNS, DDNS, UPnP, NTP, SMTP
PoE Port	RJ45 × 8 (IEEE802.3af, output power: ≤80W)

Mobile Device

OS	iOS, Android
----	--------------

Record

Record Stream	Dual stream recording
Resolution	8MP / 6MP / 5MP / 4MP / 3MP / 1080p / 1280×1024 / 960p / 720p / 960H / D1 / CIF
Frame Rate	NTSC: 30fps, PAL: 25fps
Mode	Manual, Timer, Motion, Sensor, Smart events

Face Recognition

Channel	8CH
Face Picture Database	32 libraries, 5000 face pictures
Computing Capability	180 pictures / minute
Face Picture Search	Search by picture is supported
Database Management	Add, modify, delete and search face pictures
Face Picture Adding	Add face pictures through App, Web and external import
External Face Picture Enrolment	Resolution: 128×128, 1920×1080 Size: ≤ 70KB, Format: jpg&jpeg
Face Picture Comparison	Supports allow list and block list alarm
Face Track	Yes
Map of Face Track	Resolution: 2560×1920, Size: ≤ 512KB Format: jpg&jpeg
Statistic Graph of Face Information	Bar graph
Statistic Mode of Face Information	Statistics by day, week, month, quarter as well as customised time period

Remote Monitoring

Immix	Compatible with Immix via RTSP only (2-way audio not supported)
Sentinel	Yes, Firmware 1.1.0 or later

Backup & Storage

Local Backup	USB stick, USB mobile HDD
Network Backup	Yes
Storage	HDD: SATA x1, max 8TB per HDD

Port

RS485	Yes (Full-duplex), Connect to PTZ or keyboard
USB	USB 2.0 × 1, USB 3.0 × 1
Remote Controller	Optional

Others

Power Supply	DC48V/2.5A
Consumption	≤ 15W (Without HDD and PoE power supply)
Working Environment	-10~50°C, 10%~90% (Humidity)
Dimensions	300 × 249 × 45 mm

Dimensions

