




CONFIGURING VIRDI TERMINALS USING
TERMINAL FINDER

USING TERMINAL FINDER

- Disable / Disconnect all but one Network interface.
- Set the Interfaces IP address to the same range as the Viridi Terminals. Out of the Box Viridi Terminals are set to the 192.168.0.0/24 range and have a default IP address of 192.168.0.3
- When / If prompted allow the Terminal Finder program access to your systems Firewall.

1. Select the search button.

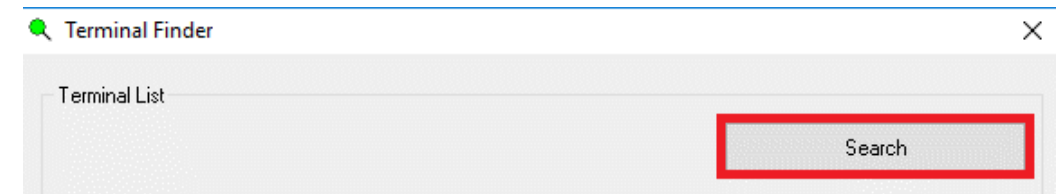

2. The Terminal List will populate with visible Terminals.

[illegible]

4. Choose between DHCP or Static IP settings.
5. Enter the Terminal ID and Server IP.
6. In the Password box enter 0842650 then Apply to save changes.

It is good security practice to change the password or Lock the configuration depending on your requirements.

Locking the configuration only locks configuration via the Terminal Finder program. Changes to networking configuration can still be made via the a Terminals OSD and or the Unis B App*

*UNIS B APP support is model dependent.

Terminal Finder

Terminal List

Search

TerminalID	IP	Version	MacAddr	SiteKey
00000001	192.168.0.3	AC5000 20.51.03-000.39/HFA...	00:02:65:13:93:EF	undefined

Set Configuration

☐ DHCP

☒ Static IP

TerminalID: 00000001

Terminal IP: 192 . 168 . 0 . 3

Subnet Mask: 255 . 255 . 255 . 0

Gateway: 192 . 168 . 0 . 1

Server Network

Server IP: 192 . 168 . 0 . 2

Port: 9870

Security

Site Key: undefined

Password: ●●●●●●●●

☐ New Password

☐ Locking Configuration (If you check this value then you can't change setting anymore)

Apply

Thank You!

Visit us at www.genieaccess.com

For the latest Genie news follow us on Twitter

 @GenieAccess