

GIP5NSMO

COVERT CAMERA

5MP H.265 Triple Stream Camera in a Smoke Detector Case - Sideways View




ONVIF®

Key Features

- 5MP resolution
- 1/ 2.8" 5MP progressive CMOS sensor
- H.265 / MJPEG triple streaming
- Minimum illumination: 0.1 Lux (Colour)
- WDR, D&N, AGC, BLC, HLC, DNR, Sens-Up
- 32mm x 32mm PCB (Video only)
- Motion detection / privacy zones
- Sideways view
- NDAA compliant

The Genie GIP5NSMO is an NDAA compliant, 5MP triple stream conical pinhole camera housed in a smoke detector case. The unit is suitable for discreet and covert operations.

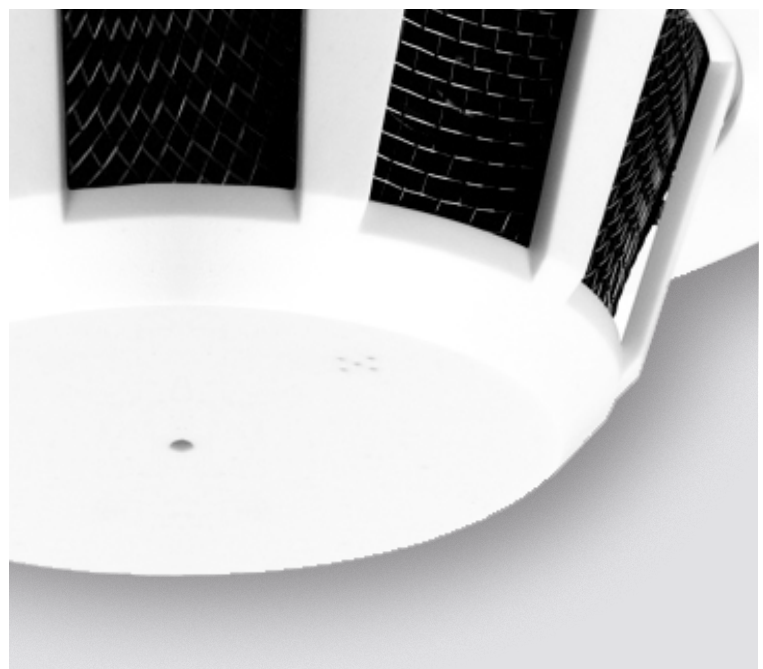

genie

Specification

Camera

Image Sensor	Sony STARVIS 5.69 Megapixel Image Sensor
Lens Type	3.7mm M12 board lens
Diagonal Size	6.46mm (Type 1/2.8)
Scan Method	Progressive Scan
Total Pixels	2704 (H) x 2104 (V), 5.69 Megapixels
Effective Pixels	2616 (H) x 1964 (V), 5.14 Megapixels
Day & Night	Auto / Day (Colour) / Night (BW), ICR Control
Privacy Area	16 Programmables Zones, On / Off
Motion Detection	432 Zone, Sensitivity 1 ~ 5 Step, On / Off
W D R	Real WDR On (Adjust) / Off
D N R	2DNR, 3DNR, On (Adjust) / Off
Defog	Detects Fog, On (Adjust) / Off
S L D C	Simple Lens Distortion Correction, On (Adjust) / Off
Elec. Shutter	Auto(1/30 ~ 1/15000), Suppress Rolling, Manual
Colour Adjust	Bright / Contrast / Saturation / Sharpness
White Balance	Auto (indoor) / Auto (Outdoor) / User
OSD Display	Text, Date, Time, Event, On / Off
Image Mirror	Normal / Mirror(H) / Flip(V) / Both(HV)
Power Supply	DC12[V] ± 10%, PoE (802.3AF)
Current	Max 250[mA]

Network

OS	Embedded Linux
Interface	RJ45 10/100 Base-T PoE
Protocol	TCP / IP, UDP / IP, RTP, RTS, RTCP, NTP, HTTP, DHCP, FTP, SMTP, DNS, DDNS
ONVIF	Ver19.12
Simultaneous Access	Max. 10 User
OS	Windows 7, 8, 10
Viewer	IE 11 or above (Active-X)

Video

Compress Format	H.265 / H.264 / MJPEG
Resolution	2560 x 1920 / 2560 x 1440 / 2048 x 1536 / 1920 x 1080 / 1280 x 1024 / 1280 x 960 / 1280 x 720 / 1024 x 768 / 640 x 480 / 320 x 240
Maximum Frame Rate	30fps at all resolutions
Video Quality	H.265 : Bitrate Control H.264 : Bitrate Control MJPEG : Quality Level Control
Streaming	Triple Stream (Stream 1, 2, 3) RTP / RTSP, Unicast RTP, Multicast RTP

Others

Operating Temperature	0°C ~ +50°C
Preservation Temperature	-10°C ~ +60°C
Operating Humidity	0~90%
Dimensions	32mm (W) X 32mm (H) X 20.00mm (D)
Weight	50g