

18.5" LED Monitor


EGM-19



User Manual

Please read these instructions carefully before operating the unit and keep for further reference. All the examples and pictures used here are for reference only. The contents of this manual are subject to change without notice.

The EGM-19 is a LED backlit LCD color monitor. The monitor is designed for continuous operation and can be used in closed circuit TV systems. The Flat Panel Display has an active matrix, thin-film transistor (TFT) and liquid crystal display (LCD).

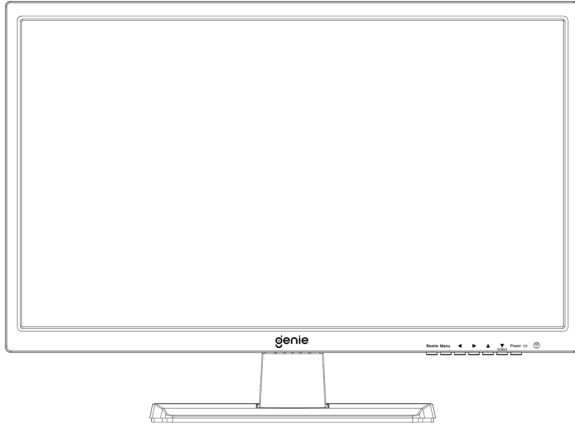

Features

- DC 12V Power Input
- Wall mounting VESA standard 100 x 100mm
- 1 x VGA Input video input Interface
- 1 x HDMI Input video input Interface
- Audio Input Interface
- Multilingual OSD menu for easy setting and optimization of the display

Specifications

Panel Type	18.5" LED Backlit Monitor
Pixels	0.300(H) x 0.300(V) mm
Maximum Brightness	250cd/m2
Contrast Ratio	1000:1 (Typ.)
Display Colour	16.7 Million Colours
Viewing Angle	178° / 178° (CR > 10)
Response Time	14ms (G2G)
Resolution	1366(H) x 768(V)
Case Type	Black Plastic
Aspect Ratio	16:9
Interface	HDMI x 1, VGA x 1
Safety & EMC Certification	CE / FCC / RoHS
Electrical Ratings	12V DC, 2A (AC 100-240V, 50/ 60 Hz)
Power Consumption	Typically 15W

Opening the Box

Check that the packing and the contents are not visibly damaged. Contact Bioaccess Sales Ltd immediately if parts are either missing or damaged. Do not attempt to use the device and retain its original packing.

Contents of the Box

- Monitor
- Power Adaptor
- HDMI Cable
- User Manual
- Table Stand

Warnings

Power

- Only use the power unit provided to power the device. Check the mains rating before plugging the power unit in.
- Do not pull the cable to unplug the device.

Safety Precautions

- Keep the device away from rain and excessive humidity to prevent any risk of electrical hazards. Do not allow any external materials (solid or liquid) inside the device. If this should accidentally occur, disconnect the device from the mains and have it inspected by qualified personnel.
- Never open the device. Contact qualified personnel or an authorised service center for repairs.
- Keep the device away from children to prevent accidental damage.
- Do not touch the device with wet hands to prevent mechanical damage.
- Do not use the device if it should fall or the external casing is damaged. Contact the Bioaccess Sales Ltd support team or your installer.
- It is advised to disconnect the power wire if the monitor is not used for an extended period.

Installation Precautions

- To prevent the monitor from overheating, ensure a flow of air through the slots in the casing is possible. At least 5 cm of free space when installing inside a rack is recommended. Additionally, do not install the monitor near sources of heat, such as radiators or hot air ducts and keep away from direct sunlight. Do not install the monitor in areas subject to excessive dust, mechanical vibrations or shocks.
- Do not install the device on an unstable surface because the device could fall causing damage or mechanical failures.
- Do not install the device in a place where it could be exposed to humidity or water.
- Stop using the device if water or other material should penetrate inside: risk of fire and electrical faults. Contact the Bioaccess Sales Ltd support team or an authorised installer.

- Slots and openings in the device casing are provided for ventilation, these openings must not be blocked or covered.
- Do not place heavy or heat generating objects on top of the device, this could damage the casing and / or increase the internal temperature causing faults.
- Do not cover the device with a cloth while it is running to prevent overheating.
- Keep magnets and magnetized objects away from the device to prevent faults.
- Do not use the device in the presence of smoke, vapor, humidity, dust or intense vibrations.
- Wait for three hours before operating the device immediately after transporting it from a cold place to a warm place and vice versa. This will allow the device to adapt to the new temperature and/or humidity, etc.
- The monitor comes with a plastic base and rubber feet. It can be positioned on a horizontal surface, such as a desk or a table. Make sure that the device is fastened firmly and that it is not resting on unstable supports or surfaces. Dropping the device could result in injury or damage.
- Adjust the brightness and contrast to obtain a perfect image.
- The monitor can also be installed on the wall by means of a bracket (not provided).


Cleaning the Device

- Rub delicately with a dry cloth to remove dust and dirt.
- Dampen the cloth with a neutral detergent if dirt cannot be removed with a dry cloth alone.
- Do not use volatile liquids (such petrol, alcohol, solvents, etc.) or chemically treated cloths to clean the device to prevent deformation, deterioration or scratches.

Privacy and Copyright


- The monitor is a device for CCTV systems. Recording of images is subject to the laws in force in your country. Recording of images protected by copyright is forbidden.
- Product users are responsible for checking and respecting all local rules and regulations concerning monitoring and recording video signals. The manufacturer SHALL NOT BE LIABLE for use of this product not in compliance with the laws in force.

Interfaces, Controls and Settings

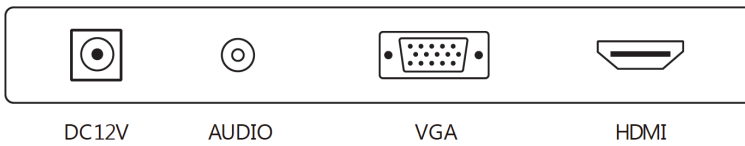

1. DC input port: Connect the supplied power supply to power the monitor
2. Audio Out: Used to connect compatible AUX devices
3. VGA: Used to connect a compatible VGA device
4. HDMI port: Used to connect a compatible device. Supports HDMI 1.4 & 2.0

Monitor Control Buttons

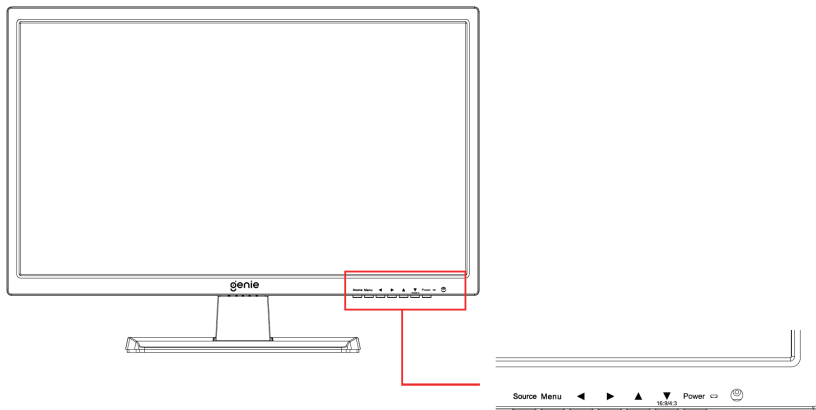

1. Source: Select an input source
2. Menu: Enter the MENU, save the adjustment of sub-menu and exit the OSD
3. Left & Right (VOL) : Change the value on selected menu
4. Up & Down : Switch a menu on OSD
5. Power: Monitor power on / off
6. LED Indicator: Blue color: monitor on, Red color : monitor standby
7. IR Receiver

OSD Menu Controls

A. Brightness



Option	Funtion	Value
Brightness	It allows changing of image brightness, according to ambient light.	0~100
Contrast	It allows changing of contrast between white and black areas of the image.	0~100
Eco Mode	Energy Saving Mode	Standard/Internet/Game/Movie
DCR	It means Dynamic Contras Ratio, provide enhanced contrast and sharpness	ON / OFF

B. Image


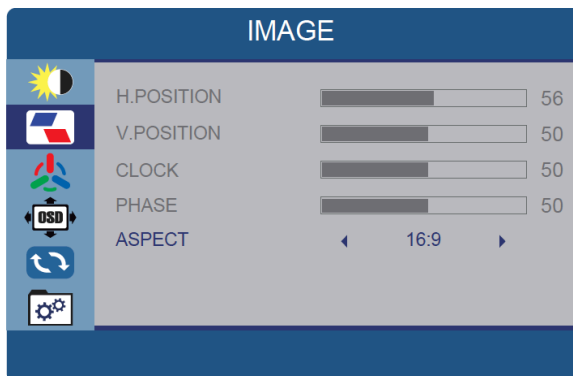


Image Setup


H.POSITION	Move the screen picture horizontally (0-100)
V. POSITION	Move the screen picture vertically (0-100)
CLOCK	Move the clock horizontally
PHASE	Move the phase position (0-100)
PASPECT	Adjust the aspect ratio (Auto /Wide/16:9)

C. Colour Temperature

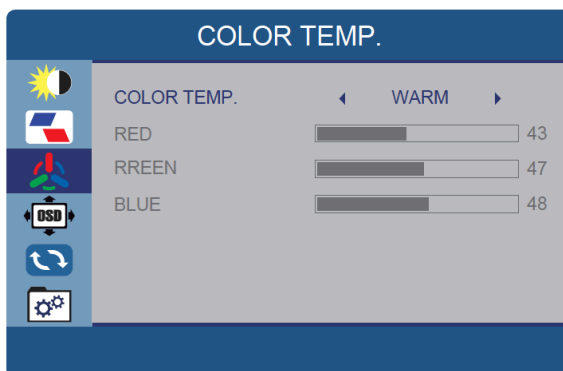


Option	Funtion	Value
Colour Temp	Adjust colour temperature	User/Cool/Normal/Warm
Red	Adjust red colour effect	0~100
Green	Adjust green colour effect	0~100
Blue	Adjust blue color effect	0~100

D. OSD Setting

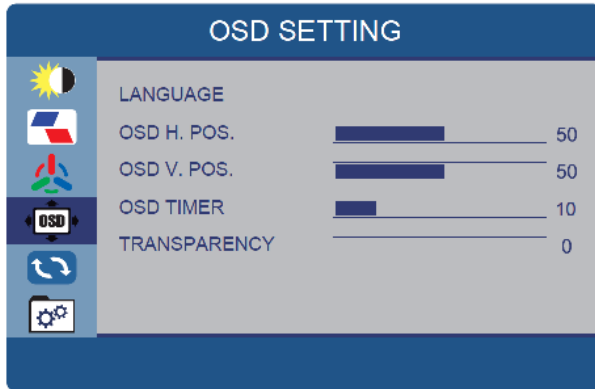


Option	Funtion	Value
LANGUAGE	Set the language of the OSD menu	English, Chinese etc.
OSD H. POS.	Move the menu position horizontally	0~100
OSD V. POS.	Move the menu position vertically	0~100
OSD TIMER	Adjust the standing time of the menu	5~100
TRANSPARENCY	Adjust the transparency of the menu	0~100

E. Reset

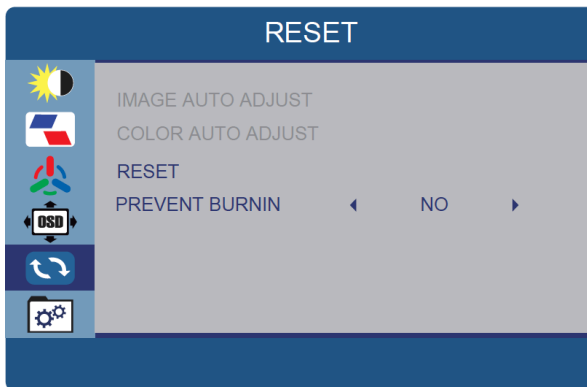

Option	Funtion	Value
IMAGE AUTO ADJUST	Auto restore the picture setting	
COLOR AUTO ADJUST	Auto restore the color setting	
RESET	Restore the factory settings	
PREVENT BURNIN	Adjust prevent burnin effect	ON/OFF

F. Miscellaneous

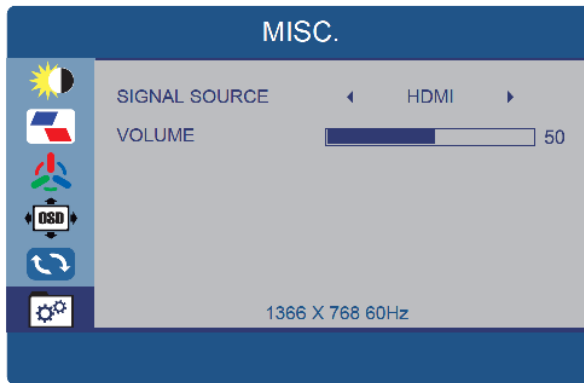

Option	Funtion	Value
SIGNAL SOURCE	Select Input HDMI and VGA	
VOLUME	Allows adjustment of the volume of the monitor from	0~100

Sales +44(0)1707 330541

Enquiries sales@genieproducts.co.uk

Website www.genieproducts.co.uk

genie