


SSIP5NLBVAF

BULLET CAMERA


5MP Stainless Steel IP IR Bullet Camera with 5–50mm Auto Focus Lens

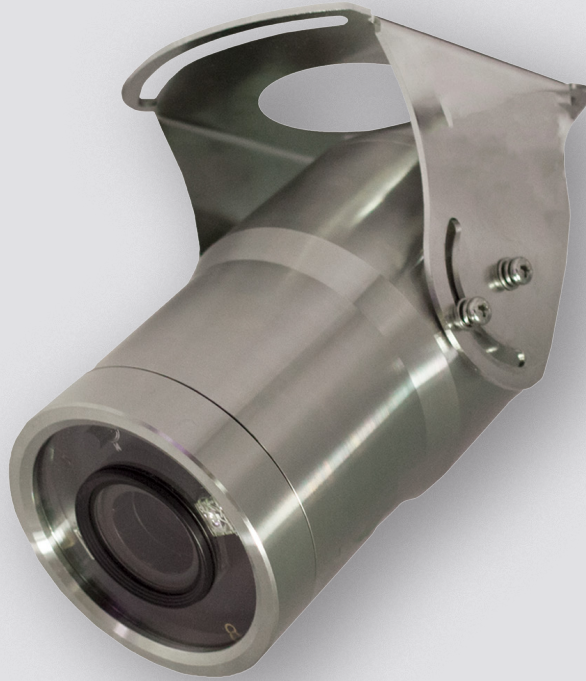

Key Features

- 1/2.8" Sony 5MP Starvis image sensor
- Max. 30fps/ (2560×1920) Resolution
- Video compression (H.265, H.264, MJPEG)
- Triple streaming
- 5–50mm motorized megapixel lens
- Super IR LEDs
- True day & night with ICR mechanism
- Real-WDR(Wide Dynamic Range)
- 3D DNR (Digital Noise Reduction)
- DC12V / PoE operation
- 3-axis gimbal bracket
- 316 grade stainless steel housing
- Weatherproof / IP 68 compliant
- NDAA compliant

The Genie SSIP5NLBVAF is a 5MP stainless steel IP IR bullet camera with a 5–50mm auto focus lens using the latest Starvis image sensor. The body is 316 grade stainless steel making this camera an ideal choice for applications in harsh environments.

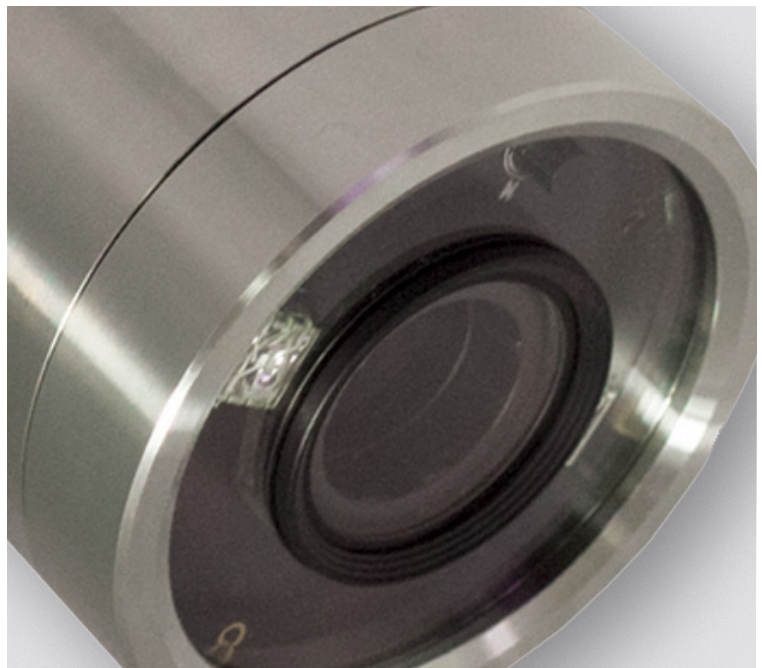

Specification

Camera

Image Sensor	Sony 5MP Starvis
Size	1/2.8"
Scanning System	Progressive scan
Lens	5-50mm motorized MP lens (ICR)
Total Pixels	2704(H) x 2104(V), 5.69 Mega Pixels
Effective Pixels	2616(H) x 1964(V), 5.14 Mega Pixels
Privacy Area	On / Off (16 Programmable Zones)
Motion Detection	432 Zone, Sensitivity 1 ~ 5 Step, On / Off
Day & Night	Auto / Day(Color) / Night(BW), ICR Control
Wide Dynamic Range	120dB
DNR	2DNR, 3DNR
External Video	CVBS 1.0Vp-p
Video Compression	H.265/H.264/MJPEG
Resolution	2560×1920 / 2560×1440 / 2048×1536 / 1600×1200 / 1920×1080 / 1280×1024 / 1280×960 / 640×480 / 640×36 / 320×240 / 320×180
Max. Frame Rate	Max 30fps@ all resolution
Video Quality	H.265 : Bitrate Control H.264 : Bitrate Control MJPEG : Quality Level Control
Video Streaming	Triple Stream (RTP/RTSP , Unicast RTP , Multicast RTP)

Others

Protocol	TCP/IP,UDP/IP,RTP,RTSP,RTCP,NTP, HTTP,DHCP,FTP,SMTP,DNS,DDNS
Power Supply	PoE, DC12[V]±10%
Working Environment	Operating : 0°C – +50°C Humidity : 0% – 90%
Dimensions	Φ72 X 168.5(W) X 120(H)
Weight	2.1 Kg (Approx.)
LAN Interface	RJ45 10/100-base-T Ethernet auto sensing PoE(IEEE 802.3af) Interface
ONVIF	ONVIF ver17.06 Profile S

Dimensions

