


WAHDN541A

DIGITAL VIDEO RECORDER

4 Channel 5-in-1 High Definition DVR

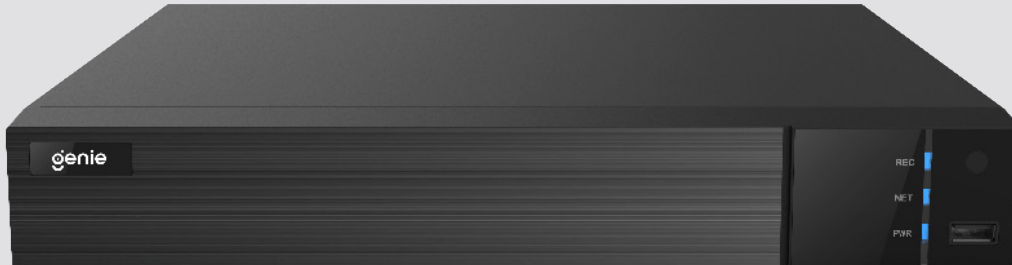

Key Features

- 4CH TVI/AHD/CVI 5MP/4MP 1080p/720p/WD1 video input
- 4CH DVR's default support 2/4 CH 5MP/4MP/3MP/1080p/960p/720p IP video input
- Standard H.265 high profile compression format to get high-quality video at much lower bit rate
- Intuitive and user-friendly Graphics User Interface (GUI), window style operation by mouse
- Multi-mode recording: manual/timer/sensor/motion
- Playback : 4CH simultaneous playback
- Multi-user online simultaneously
- Search: time slice, time, event (manual, motion), tag search
- Express and flexible backup via USB, Network and so on
- Pentaplex: preview, record, playback, backup and remote access
- DHCP, DDNS, PPPoE network protocol
- Remote control via Web Client or CMS: preview, playback, backup, PTZ and configuration
- Support PTZ preset and auto cruise, up to 255 presets and 8 cruises
- Authorisation management, log review and device status review
- Support remote network transmission and remote surveillance with mobile device
- 1080p output, true high resolution display
- Support NAT function and QR code scanning by mobile phones
- Powerful mobile surveillance by smart phones with iOS and Android OS
- 4CH analog video input can be switched to 4CH IP video input for 4CH DVR
- NDA compliant

The Genie WAHDN541A is a 5-in-1 DVR compatible with AHD, TVI, CVI, CVBS and IP cameras available in 4 channel formats. It has the ability to connect to analogue and IP cameras simultaneously and encode the video streams using the H.265 high profile compression format which gives longer recording times compared to H.264 encoding. It is a highly versatile cost-effective solution suitable for many CCTV applications.



genie

Specification

System

OS Embedded Linux

Video

Analogue Video Input BNC x4
BNC interface (1.0Vp-p, 75Ω)
TVI/AHD/CVI :
5MP/4MP/1080P/720P/WD1 (live)

IP Video Input 2CH (Up to 6CH)
Up to 5MP@30fps

Total Input 6CH

Output HDMI × 1 :
1920×1080/1280×1024/1024×768
VGA × 1 : 1920 × 1080 / 1280 × 1024 /
1024 × 768
BNC × 1 : CVBS (used as the main or
spot output)

Compression H.264/H.265/H.265+

Multi-screen Display 1 /4/6/9

Audio

Input RCA x4

Output RCA x1 (Linear, 600Ω)

Two-Way Audio Take up channel one audio input

Compression G.711(U/A)

Record

Resolution 5MP Lite / 4MP Lite / 1080p / 1080p
Lite / 720p / WD1
Analogue Channel:
5MP Lite @ 10fps (PAL / NTSC)

4MP Lite / 1080P @ 12fps (PAL) /
15fps (NTSC)

Frame Rate 1080P Lite / 720P / WD1 @ 25fps
(PAL) / 30fps (NTSC)

IP Channel:
25fps (PAL) / 30fps (NTSC)

Bit Rate 32Kbps ~ 4Mbps

Mode Manual, Timer, Motion, Smart Event

Mobile Device

OS iOS, Android

Storage

HDD SATA x1, Up to 10TB

Playback

Playback 4CH

Search Time Slice / Time / Event / Tag
Search

Smart Search Highlight colours to display the
camera record in a certain period
of time, different colours refer to
different record events

Function Play, Pause, FF, FB, Digital Zoom, etc.

Alarm

Mode Manual, Motion, Exception, Sensor
Smart Event

Input 4CH

Output 1CH

Network

Interface RJ45 100Mbps x 1

Protocol TCP / IP, IPv4, IPv6, PPPoE, DHCP,
DNS, DDNS, UPnP, HTTP, HTTPS,
802.1x, FTP, RTP, RTSP, RTCP, NTP,
SMTP, UDP, Websocket, SNMP, IGMP

Incoming Bandwidth 16Mbps(max.32Mbps)

Outgoing Bandwidth 40Mbps

Client Connection Max. 5 users access

AI Function

Smart Motion Detection 4CH

Performance

Perimeter Protection 1CH

Performance

Backup

Local Backup U disk, USB mobile HDD

Network Backup Yes

Port

RS485 Yes (Half-duplex), Connect to PTZ or
Keyboard

USB USB 2.0 × 2

Remote Controller Optional

Others

Power Supply	DC12V/1.5A
Consumption	≤10W (Without HDD)
Working Environment	-10~50°C, 10%~90% (humidity)
Dimensions	300 × 249 × 45mm (W × D × H)
Certificate	CE, FCC
Environmental Protection	Directive EU RoHS, WEEE, REACH

Dimensions

