


SSIP5NB

BULLET CAMERA


5.69MP Stainless Steel IP IR Bullet Camera with 2.8mm Lens

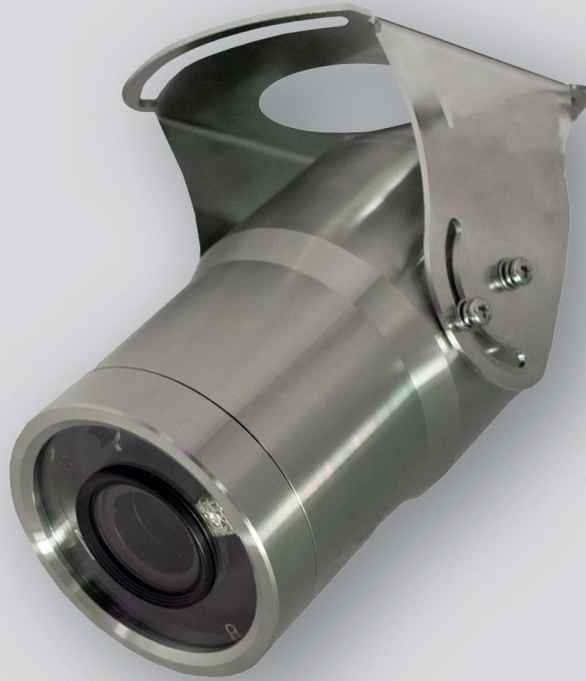

Key Features

- 1/2.8" Sony 5.69MP Starvis image sensor
- 2560 × 1920 resolution
- 30fps/all resolution
- 2.8mm fixed lens
- Triple streaming (H.265, H.264, MJPEG)
- Chip IR LEDs
- True day & night with ICR mechanism
- WDR (Wide Dynamic Range)
- 3DNR (Digital Noise Reduction)
- Stainless Steel Body (AISI 316L grade)
- Weatherproof / IP68 compliant
- PoE / DC12V operation
- NDAA compliant

The Genie SSIP5NB is an IP 5MP bullet camera with a 2.8mm fixed lens. The body is 316 grade stainless steel making this camera an ideal choice for applications in harsh environments.

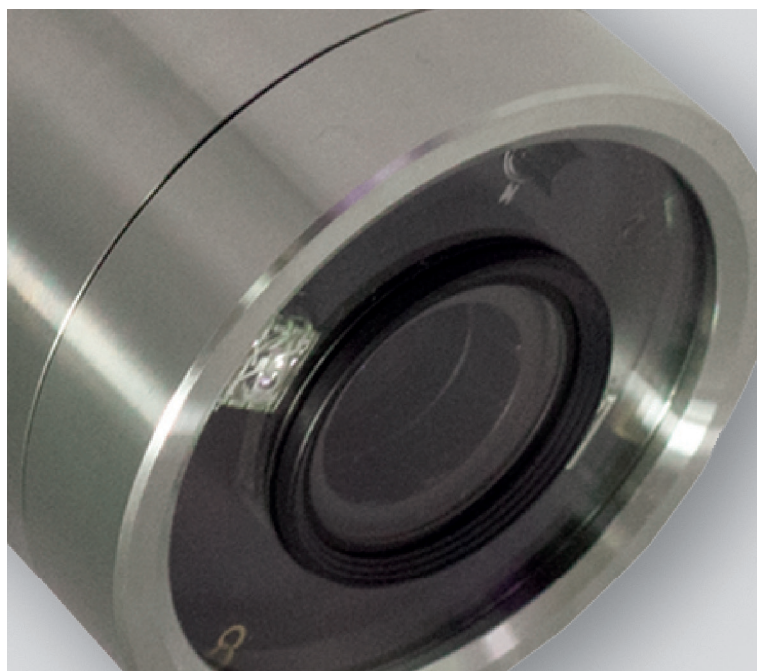

Specification

Camera

Image Sensor	1/2.8" Sony 5.69MP Starvis
Electronic Shutter	Auto (1/15-1/15000), Suppress rolling, Manual
Scanning System	Progressive scan
Lens	2.8mm fixed lens
Total Pixels	2704(H) x 2104(V), 5.69 Mega Pixels
Effective Pixels	2616(H) x 1964(V), 5.14 Mega Pixels
Privacy Area	On / Off (6 programmable zone)
Motion Detection	432 Zone, Sensitivity 1~5 Step, On / Off
Day & Night	Auto / Day (Colour) / Night (B&W), ICR control
Wide Dynamic Range	120dB
DNR	2DNR, 3DNR
Video Compression	H.265/H.264/MJPEG
Resolution	2560×1920 / 2560×1440 / 2048×1536 / 1600×1200 / 1920×1080 / 1280×1024 / 1280×960 / 640×480 / 640×36 / 320×240 / 320×180
Max Frame Rate	Max 30fps @ all resolution
Video Quality	H.265 Bitrate Control H.264 Bitrate Control MJPEG: Quality Level Control
Video Streaming	Triple Stream (RTP/RTSP, Unicast RTP, Multicast RTP)
LAN Interface	RJ45 10/100-base-T Ethernet auto sensing PoE (IEEE 802.3af) Interface
Protocol	TCP/IP, UDP/IP, RTP, RTSP, RTCP, NTP, HTTP, DHCP, FTP, SMTP, DNS, DDNS

Others

Power Supply	POE, DC12V[V] +/- 10%
Working Environment	Operating : 0°C ~ +50°C Humidity : 0% ~ 90%
Dimensions	Ø58 × 126(L) × 104(H)mm
Weight	920g (Approx.)
Ingress Protection	IP67
Onvif	ONVIF Ver17.06 Compliant

Dimensions

