

GCN4000

VIDEO INTERCOM

Video Intercom Door Station



Key Features

- 3.5 inch TFT screen
- 2MP (1920×1080) real-time H.265 encoding
- Face recognition distance: 0.3m-2m
- Supports face detection technology distinguishing real faces from non-real face spoof attacks
- Supports 3D DNR, HWDR, BLC, HLC, Defog, etc.
- Supports multiple door opening modes
 - (by swiping card, by password, by face recognition, etc.)
- Supports door opening by indoor station or by mobile APP
- Supports copy-prevention for IC card; supports IC card encryption
- Supports anti-tampering alarm; support triggering alarms when the door is not secured or the door is broken by others
- Supports calling indoor station/APP
- Supports 2.4G Wi-Fi; Support P2P function
- Supports remote surveillance via mobile APP, web browser or tablet PC
- Intelligent analytics: video exception detection, face detection, face capture, face comparison
- IP67

The Genie **GCN4000** features an ultra-bright 3.5-inch TFT colour screen, a 2MP camera and supports face recognition with anti-spoofing technology. It offers multiple authentication factors, including face, multiple IC card technologies at 13.56MHz & 125KHz frequencies, and passwords. When working in conjunction with our aesthetically pleasing Genie GCN7000 indoor panel, users can remotely communicate with visitors and unlock doors via the SuperLive Plus mobile app, the built-in web server, Genie NVR, and Genie NVR web server.



Specification

Camera

| | |
|-----------------------------|--|
| Image Sensor | 1 / 2.8" CMOS |
| Image Size | 1920 × 1080 |
| Electronic Shutter | Auto / Manual; Manual:1/2s ~ 1/100000s |
| IRIS Type | Fixed IRIS |
| Minimum Illumination | Colour : 0.0085 Lux @ F1.2, AGC ON B&W: 0 Lux with IR |
| Lens | HD dual lens: 2.3mm @ F2.2 Vertical FOV: approx. 74 Horizontal FOV: approx. 139 Diagonal FOV: approx. 170 |
| WDR | 120dB |
| S / N Ratio | ≥50dB |
| BLC | Yes |
| HLC | Yes |
| Defog | Yes |
| DNR | 2D/3D NR |

Screen

| | |
|----------------------------|--|
| 3.5 Inch TFT Screen | Resolution: 320 (RGB) × 480 |
| Brightness | 250cd/m ² |
| Auto sleeping | Support auto wakeup when detecting a person or wakeup by pressing a button |

Card

| | |
|-------------------------------|---|
| Card Type | Mifare card / Desfire card / FM1208 Card / Gicard / EM Card |
| Card Reading Protocol | ISO14443A / B protocol, EM41XX |
| Card Reading Frequency | 13.56MHz & 125KHz |
| Card Reading Duration | <1s |
| Card Reading Distance | 0~2cm |
| Card Capacity | 10000 |

Access Control

| | |
|-------------------------------|---|
| Personal Properties | Face picture, ID number, list type (group), name, gender, age, phone number, card ID, password, door opening mode, note |
| Door Opening Modes | By face recognition/swiping card/password/indoor station/APP |
| Schedule | Yes |
| Mask Detection | Yes |
| Secondary Door Station | Yes |
| Capacity | 50000 event items can be recorded |

Image

| | |
|-----------------------------------|--|
| Video Compression | Main stream: H.265+/H.265/H.264+/H.264 Sub/third stream: H.265+/H.265/H.264+/H.264/MJPEG |
| H.264 Compression Standard | Baseline Profile / Main Profile / High Profile |
| Bit Rate Type | VBR/CBR |
| Bit Rate | 64Kbps ~ 6Mbps |
| Resolution | 1080P(1920×1080), 720P(1280×720), D1, CIF, 480×240 |
| Main Stream | 1920 × 1080/1280 × 720 (60Hz: 1~30fps; 50Hz: 1~25fps) |
| Sub Stream | 720P/D1/CIF (60Hz: 1~30fps; 50Hz: 1~25fps) |
| Third Stream | D1/CIF/480 × 240 (60Hz: 1~30fps; 50Hz: 1~25fps) |
| Image Setting | Saturation, hue, brightness, contrast, wide dynamic range, sharpness, NR, etc., adjustable through client or web browser |
| Audio Compression | G711A/U |

Interfaces

| | |
|------------------------------|--|
| Network | RJ45(10/100 Base-T) |
| Audio | Built-in MIC×1, built-in speaker×1; support noise suppression and echo cancellation |
| Storage | Built-in micro SD card slot, up to 256GB |
| Reset | Yes |
| RS485 | Yes (for card reader or access control system access) |
| Wiegand Interface | Yes, input/output configurable. 26bit(8), 26bit(10), 34bit, 37bit, 42bit, 46bit, 58bit or 66bit selectable |
| Alarm | 2CH alarm input; 1CH alarm output |
| Door Lock Output | 2CH |
| Door Contact Input | 2CH |
| Exit Button | 2CH |
| Anti-Tamper Interface | 1CH |
| Digital Buttons | Yes |
| Wi-Fi | Support 2.4G Wi-Fi function |

Function

| | |
|------------------------------|--|
| Remote Monitoring | Web client/indoor station/NVMS remote control |
| Online Connection | Supports simultaneous monitoring for up to 10 users Supports multi-stream real time transmission |
| Network Protocol | UDP, IPv4, IPv6, DHCP, NTP, RTSP, PPPoE, DDNS, SMTP, FTP, 802.1x, UPnP, HTTPS, QoS, SIP |
| Interface Protocol | ONVIF |
| Storage | Network remote storage SD card storage |
| Intelligent Analytics | SD card error, SD card full, IP address conflict, network disconnection |
| General Function | Watermark, IP address filtering, heartbeat, illegal login |
| PoE | Yes (802.3af) |
| P2P | Yes, turn on by default |
| IR Distance | 0.3~2m |
| Protection Grade | IP67, IK04 |
| Network Security | Video encryption, firmware encryption, configuration encryption, digest, illegal login lock, IP address filtering, HTTPS, 802.1x |


Intelligent Analytics

| | |
|---|--|
| Intelligent Analytics | Face detection, face capture, face comparison |
| Face Detection | Pupil distance of a facial image over 20 pixel can be detected |
| Face Capture | Outputting the optimal face image by precise detecting, tracing, capturing, scoring and screening the moving faces |
| Original Image Capturing | Supports original image capturing and self-defined overlaid information (like device ID, time, etc.) |
| Face Picture Database | 10000 |
| Face Comparison Storage | Face pictures can be added, modified or deleted in the face database. |
| Face Picture Adding | Adding face pictures through WEB, NVR or NVMS |
| External Face Picture Enrollment | Size: less than 200KB JPG/JPEG format |
| Face Comparison Alarm | Face detection alarm, allow list, block list and stranger alarm |

Others

| | |
|---------------------------------|--|
| Power | DC12V/PoE |
| Power Consumption | < 12W |
| Environmental Protection | RoHS 2.0, REACH, WEEE, directive94/62/EC |
| Working Environment | -20 ~60 , Humidity: less than 95% (non-condensing) |
| Dimensions(mm) | Approx. 210mm × 104mm ×30mm |
| Weight (net) | Approx. 0.6 kg |
| Installation | Wall Mounting |

Dimensions

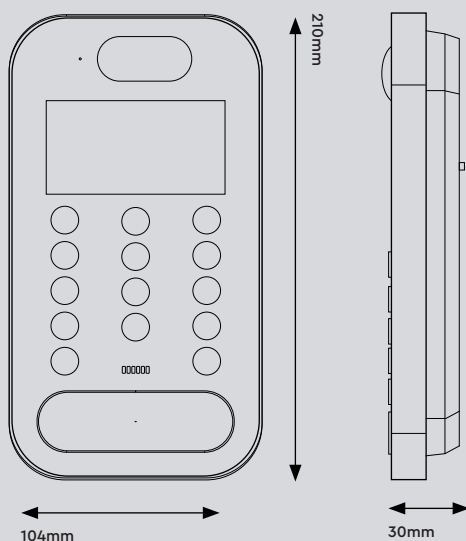

Accessories



GCN4000FMH

Flush mount housing